




LA GAMMA | THE RANGE, LA GAMME
MODELL ÜBERSICHT, LA GAMA

MINI-ESCAVATORI

MINI-EXCAVATORS, MINI-PELLES
MINIBAGGER, MINI-EXCAVADORAS

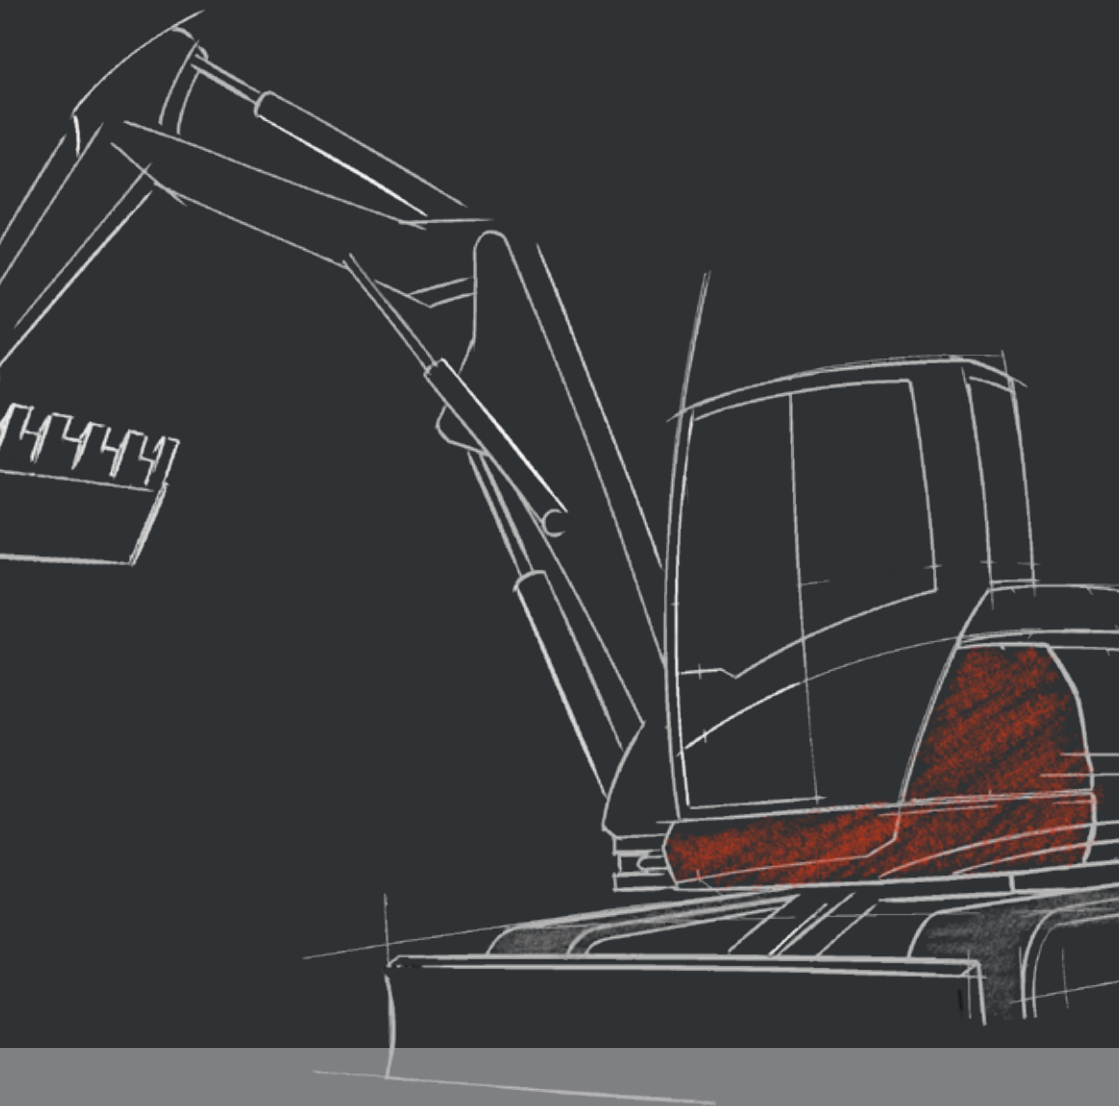

Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Profondità di scavo Digging depth Prof. d'excavation Grabtiefe Prof. de excavación	Larghezza max. Max width Largeur max. Max. breite Anchura max.
10 ZT	1.060 kg (2,337 lb)	YANMAR STAGE 5	7,6 kW - 10,0 HP	1.620 mm (63.8 in)	min. 760 mm (29.9 in) max. 990 mm (39.0 in)
12 ZT	1.160 kg (2,557 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	10,2 kW - 13,7 HP	1.860 mm (73.2 in)	min. 790 mm (31.1 in) max. 1.050 mm (41.3 in)
14 SR	1.230 kg (2,712 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	10,2 kW - 13,7 HP	2.045 mm (80.5 in)	min. 790 mm (31.1 in) max. 1.050 mm (41.3 in)
18 ZT	1.730 kg (3,813 lb)	YANMAR STAGE 5 - TIER 4 FINAL	11,2 kW - 15,2 HP	2.300 mm (90.6 in)	min. 990 mm (39.0 in) max. 1.300 mm (51.2 in)
22 SR	2.190 kg (4,828 lb)	KUBOTA STAGE 5	15,4 kW - 20,9 HP	2.465 mm (97.0 in)	min. 990 mm (39.0 in) max. 1.300 mm (51.2 in)
24 SR	2.360 kg (5,203 lb)	YANMAR STAGE 5	14,0 kW - 19,0 HP	2.493 mm (98.2 in)	1.450 mm (57.1 in)
25 ZT	2.540 kW (5.401lb)	YANMAR STAGE 5	15,5 kW - 21,1 HP	2.725 mm (107.2 in)	1.500 mm (59.1 in)



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Profondità di scavo Digging depth Prof. d'excavation Grabtiefe Prof. de excavación	Larghezza max. Max width Largeur max. Max. breite Anchura max.
ES 28.2 ZT	2.700 kg (5,952 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	24,9 kW - 33,4 HP	2.570 mm (101.1 in)	1.550 mm (61.0 in)
ES 35.2 ZT	3.350 kg (7,385 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	24,9 kW - 33,4 HP	2.880 mm (113.3 in)	1.580 mm (62.2 in)
ES 40.2 ZT	3.800 kg (8,377 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	28,3 kW - 38,0 HP	3.200 mm (126.0 in)	1.700 mm (66.9 in)
ES 50 ZT	5.150 kg (11,354 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	33,8 kW - 46,0 HP	3.600 mm (141.7 in)	1.980 mm (78.0 in)
ES 57 ZT	5.600 kg (12,345 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	33,8 kW - 46,0 HP	3.850 mm (151.6 in)	1.980 mm (78.0 in)
ES 60 TR	6.050 kg (13,337 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	33,8 kW - 46,0 HP	3.950 mm (155.5 in)	1.980 mm (78.0 in)
60 ZT •	5.700 kg (12,566 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	45,0 kW - 61,2 HP	3.850 mm (151.6 in)	1.980 mm (78.0 in)



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Profondità di scavo Digging depth Prof. d'excavation Grabtiefe Prof. de excavación	Larghezza max. Max width Largeur max. Max. breite Anchura max.
65 TR	6.200 kg (13,669 lb)	• KUBOTA STAGE 5 - TIER 4 FINAL	45,0 kW - 61,2 HP	3.950 mm (155.5 in)	1.980 mm (78.0 in)
ES 85 SB	8.300 kg (18,298 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	3.800 mm (149.6 in)	2.320 mm (91.3 in)
85 SB	8.300 kg (18,298 lb)	• YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	3.800 mm (149.6 in)	2.320 mm (91.3 in)
ES 85 ZT	9.000 kg (18,298 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	4.270 mm (168.1 in)	2.320 mm (91.3 in)
90 ZT	9.000 kg (18,298 lb)	• YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	4.270 mm (168.1 in)	2.320 mm (91.3 in)
ES 90 UR	9.100 kg (20,062 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	4.220 mm (166.1 in)	2.320 mm (91.3 in)
95 UR	9.100 kg (20,062 lb)	• YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	4.220 mm (166.1 in)	2.320 mm (91.3 in)
ES 95 TR	9.900 kg (21,825 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	4.570 mm (179.9 in)	2.320 mm (91.3 in)
100 TR	9.900 kg (21,825 lb)	• YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	4.570 mm (179.9 in)	2.320 mm (91.3 in)

• Turbo



PALE COMPATTE GOMMATE

COMPACT WHEELED LOADERS, CHARGEUSES SUR PNEUS,
REIFENKOMPAKTLADER, MINICARGADORAS COMPACTAS DE RUEDAS



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Carico operativo Operating load Charge opérationnel Betriebshublast Carga operativa	Larghezza max. Max width Largeur max. Max. breite Anchura max.
ESK 130.5	1.830 kg (4,034 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	26,1 kW - 35,5 HP	485 kg (1,069 lb)	1.250 mm (49.2 in)
ESK 150.5	2.750 kg (6,063 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	48,0 kW - 64,4 HP	680 kg (1,499 lb)	1.550 mm (61.0 in)
17 SK	3.100 kg (6,834 lb)	• KUBOTA STAGE 5 - TIER 4 FINAL	53,0 kW - 72,1 HP	950 kg (2,094 lb)	1.680 mm (66,1 in)
ESK 190	4.350 kg (8,598 lb)	• YANMAR STAGE 3A - TIER 3	63,9 kW - 86,9 HP	1.450 kg (3,638 lb)	1.860 mm (72,4 in)
19 SK	4.350 kg (8,598 lb)	• YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	1.450 kg (3,638 lb)	1.860 mm (72,4 in)

• Turbo

PALE COMPATTE CINGOLATE

COMPACT TRACKED LOADERS, CHARGEUSES SUR CHENILLES,
RAUPENKOMPAKTTLADER, MINICARGADORAS COMPACTAS DE CADENAS



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Carico operativo Operating load Charge opérationnel Betriebshublast Carga operativa	Larghezza max. Max width Largeur max. Max. breite Anchura max.
ETL 160.5	3.500 kg (7,716 lb)	CUMMINS STAGE 3A - TIER 4 INTERIM	48,0 kW - 64,4 HP	1.100 kg (2,425 lb)	1.680 mm (66.1 in)
18 TL	4.100 kg (9,039 lb)	• KUBOTA STAGE 5 - TIER 4 FINAL	53,0 kW - 72,1 HP	2.570 kg (5,666 lb)	1.760 mm (69.3 in)
ETL 200	5.470 kg (12,059 lb)	• YANMAR STAGE 3A - TIER 3	63,9 kW - 86,9 HP	2.572 kg (5,670 lb)	2.110 mm (83.1 in)
20 TL	5.470 kg (12,059 lb)	• YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	2.572 kg (5,670 lb)	2.110 mm (83.1 in)

• Turbo

TERNA E CARICATORE

LOADER & BACKHOE LOADER, CHARGEUSE PELLETEUSE,
KNICK-GELENKTE RAD- & BAGGERLADER, MIXTA ARTICULADA



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Profondità di scavo Digging depth Prof. d'excavation Grabtiefe Prof. de excavación	Larghezza max. Max width Largeur max. Max. breite Anchura max.
E 245 K TERNA BACKHOE LOADER TRACTOPELLE BAGGERLADER MIXTA	3.800 kg (8,378 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	35,6 kW - 48,4 HP	3.000 mm (118.1 in)	1.450 mm (57,1 in)
E 245 K CARICATORE LOADER CHARGEUSE RADLADER CARGADORA	3.800 kg (8,378 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	35,6 kW - 48,4 HP	-	1.450 mm (57,1 in)



Attachments

Increase your productivity





Modello • Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Larghezza max. Max width Largeur max. Max. breite Anchura max.
ESP 22 SR	1.820 kg (4,012 lb)	KUBOTA STAGE 5	15,4 kW - 20,9 HP	min. 990 mm (39.0 in) max. 1.300 mm (51.2 in)
ESP 24 SR	2.100 kg (4,630 lb)	YANMAR STAGE 5	14,0 kW - 19,0 HP	1.450 mm (57.1 in)
ESP 25 ZT	2.250 kW (4,960 lb)	YANMAR STAGE 5	15,5 kW - 21,1 HP	1.500 mm (59.1 in)
ESP 28.2 ZT	2.800 kg (6,173 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	24,9 kW - 33,4 HP	1.550 mm (61.0 in)
ESP 35.2 ZT	3.050 kg (6,724 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	24,9 kW - 33,4 HP	1.580 mm (62.2 in)
ESP 40.2 ZT	3.800 kg (8,377lb)	KUBOTA STAGE 5 - TIER 4 FINAL	28,3 kW - 38,0 HP	1.700 mm (66.9 in)

• Range in progress



Modello • Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Larghezza max. Max width Largeur max. Max. breite Anchura max.
ESP 50 ZT	4.900 kg (10.803 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	33,8 kW - 46,0 HP	1.980 mm (78,0 in)
ESP 60 ZT	5.200 kg (11.464 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	33,8 kW - 46,0 HP	1.980 mm (78,0 in)
ESP 100 ZT	9.220 kg (20.327 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	STD: 2320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)
ESP 100 UR	8.720 kg (19.224 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	STD: 2320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)
ESP 100 ZT4	9.220 kg (20.327 lb)	YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	STD: 2320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)
ESP 100 UR4	8.720 kg (19.224 lb)	YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	STD: 2320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)

• Range in progress



Sampierana S.p.A.

Via Leonardo da Vinci, 40 47021

S. Piero in Bagno (FC) - ITALY

Tel +39 0543.904211

www.eurocomach.com



**COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =**

The information contained in this document is of general nature. Sampierana S.p.A. reserves the right to change technical data and product characteristics at any time without prior notice. The photos are for illustrative purposes only and do not necessarily refer to standard products. For instructions on the correct use of the products, see the use and maintenance manual. Sampierana S.p.A. shall not be held responsible for any damage to people and/or property, if the instructions contained in the use and maintenance manual are not complied with.